

# Quality Control-2

The ASTA team

## Contents

0.1	OC curves . . . . .	1
0.2	OC curves - example . . . . .	2
0.3	CUSUM chart . . . . .	2
0.4	Interpretation of CUSUM chart . . . . .	3
0.5	CUSUM chart example . . . . .	3
0.6	EWMA chart . . . . .	4
0.7	EWMA chart . . . . .	4
0.8	EWMA chart example . . . . .	5
0.9	Multivariate charts . . . . .	5
0.10	Multivariate charts . . . . .	6
0.11	Multivariate chart example . . . . .	6
0.12	Multivariate chart example . . . . .	6
0.13	Multivariate chart example . . . . .	7
0.14	Acceptance sampling . . . . .	8
0.15	Sampling distributions . . . . .	8
0.16	OC curve of a sampling plan . . . . .	9
0.17	OC curve of a sampling plan . . . . .	9
0.18	Find sampling plan . . . . .	10
0.19	Find sampling plan . . . . .	10
0.20	Double sampling . . . . .	11
0.21	OC curve of a double sampling plan . . . . .	11
0.22	OC curve of a double sampling plan . . . . .	11

### 0.1 OC curves

Usual setup:

- $m$  samples with sample size  $n$ .
- Process mean  $\mu$  and standard deviation  $\sigma$ .
- Sample means have standard deviation  $\frac{\sigma}{\sqrt{n}}$ .
- By default we use the  $3\sigma$  rule.

Assume that the mean is shifted by  $c \times \sigma$ .

What is the probability of NOT getting an immediate alarm?

This is also called a **type II error**.

```
library(qcc)
data(pistonrings)
diam   <- pistonrings$diameter
phaseI <- matrix(diam[1:125], 25, byrow=TRUE)
```


```

phaseII <- matrix(diam[126:200], 15, byrow=TRUE)
xbcc     <- qcc(phaseI, std.dev = "UWAVE-SD", type = "xbar", plot = FALSE,
                  newdata = phaseII, title = "qq chart: pistonrings")

```

## 0.2 OC curves - example

```
oc.curves(xbcc)
```

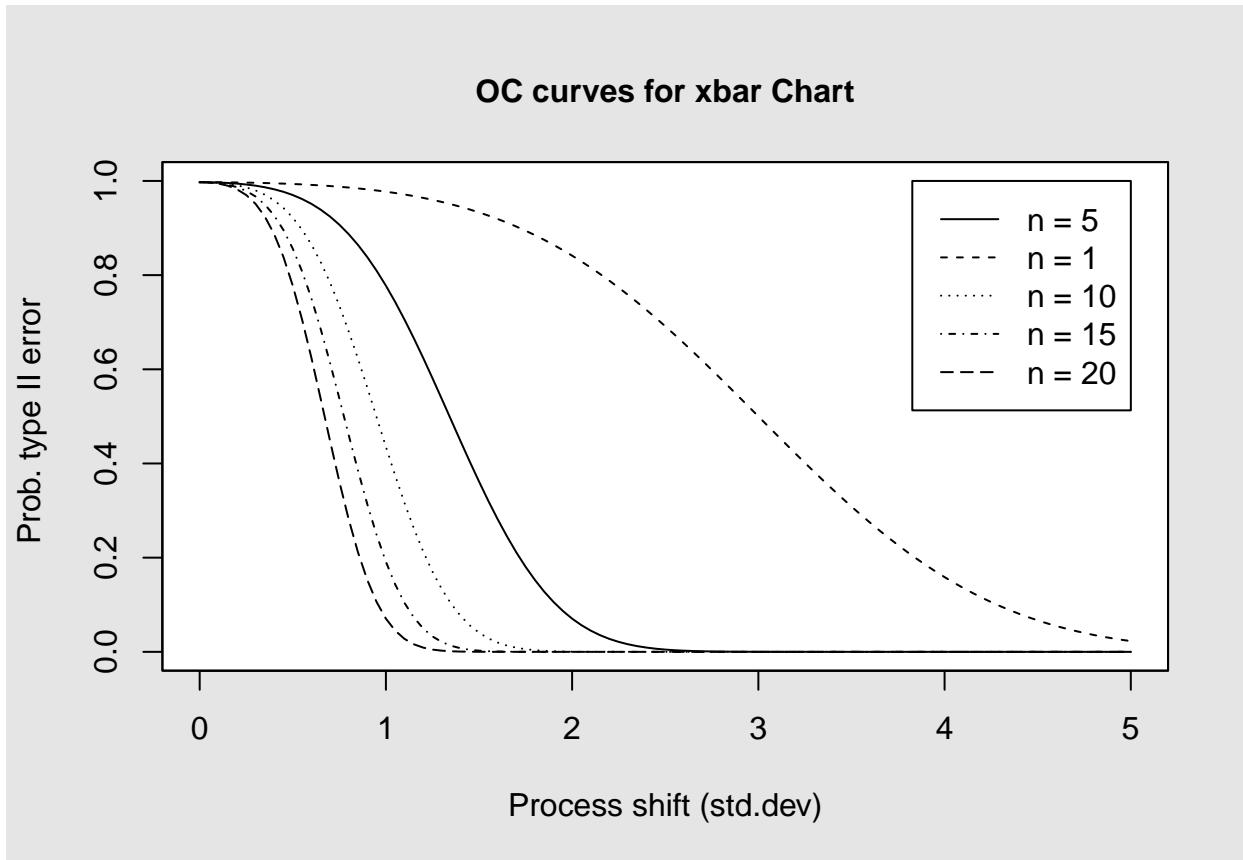

For the actual sample size ( $n=5$ ) and in case of a process shift  $c=2$ , the error probability is around 7%.

If we increase sample size to  $n=10$  then we are almost sure to immediate detection of a shift by  $2\sigma$ .

## 0.3 CUSUM chart

The CUSUM chart is generally better than the xbar chart for detecting small shifts in the mean of a process.

Consider the standardized residuals

$$z_i = \frac{\sqrt{n}(x_i - \hat{\mu}_0)}{\hat{\sigma}}$$

where

- $\hat{\mu}_0$  is an estimate of the process mean.
- $\hat{\sigma}$  is an estimate of the process standard deviation.

For an in-control proces the cumulative sum (CUSUM) of residuals should vary around zero.

The CUSUM chart is developed to see, if there is a drift away from zero. To that end we define 2 processes controlling for downward(D) respectively upward(U) drift:

$$D(i) = \max\{0, D(i - 1) - k - z_i\}$$

$$U(i) = \max\{0, U(i - 1) + z_i - k\}$$

where  $k$  is a positive number.

## 0.4 Interpretation of CUSUM chart

Interpretation of

$$D(i) = \max\{0, D(i - 1) - k - z_i\}$$

$$U(i) = \max\{0, U(i - 1) + z_i - k\}$$

- If  $z_i < -k$ , i.e.  $z_i$  is more than  $k$  below zero, then  $D$  is increased. If this happens a number of times in a row, then  $D$  grows “big”.
- If  $z_i > k$ , i.e.  $z_i$  is more than  $k$  above zero, then  $U$  is increased. If this happens a number of times in a row, then  $U$  grows “big”.


The process is considered out of control if  $D$  or  $U$  exceeds a limit  $h$ .

In qcc  $k$  and  $h$  is specified by the arguments:

- `se.shift` is  $k$ , which has a default value of 1.
- `decision.interval` is  $h$ , which has a default value of 5.

## 0.5 CUSUM chart example

```
h <- cusum(phaseI, newdata = phaseII, title = "CUSUM chart: pistonrings")
```

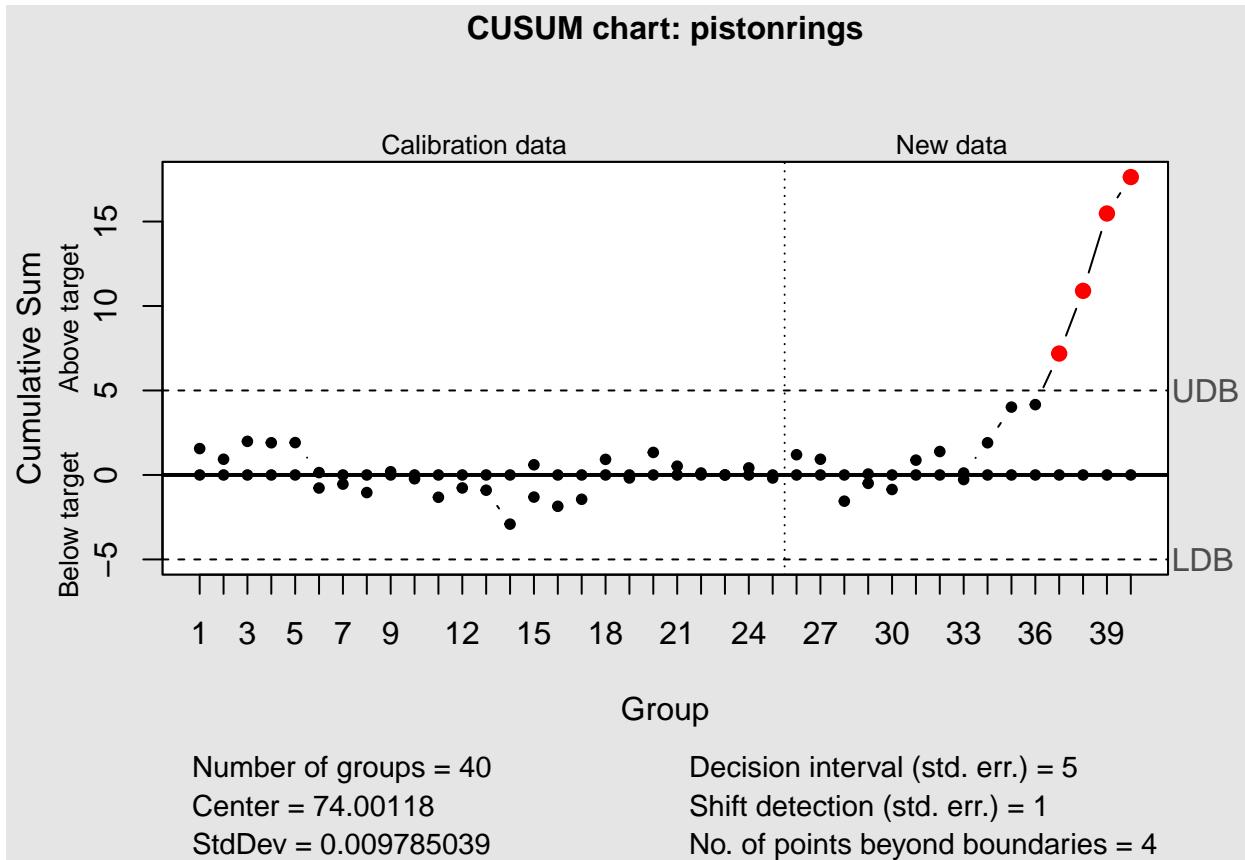

The chart includes a plot of

- U controlling for positive drift, which is clearly happening in phase II.
- D controlling for negative drift.

## 0.6 EWMA chart

The Exponentially Weighted Moving Average (EWMA) is a statistic for monitoring the process, which averages the data in a way that gives most weight to recent data.

The EWMA is formally defined by

$$M_t = \lambda x_t + (1 - \lambda)M_{t-1}, \quad t = 1, 2, \dots, T$$

where

- $M_0$  is the mean of some historical data.
- $x_t$  is the measurement at time  $t$ .
- $T$  is the length of the sampling period.
- $0 < \lambda \leq 1$  is a smoothing parameter, where  $\lambda = 1$  corresponds to “no memory”.

The influence of  $x_t$  on  $M_{t+s}$  is of the order  $(1 - \lambda)^s$ , i.e. exponentially decreasing, which explains the term “Exponentially Weighted”.

## 0.7 EWMA chart

Estimated variance for the EWMA process

- $s_M^2 = \frac{\lambda}{2-\lambda} s^2$
- $s$  is the standard deviation from historical data.

$$\text{UCL: } M_0 + ks_M$$


$$\text{CL : } M_0$$

$$\text{LCL: } M_0 - ks_M$$

Conventional choice of  $k$  is 3.

## 0.8 EWMA chart example

```
h <- ewma(phaseI, newdata = phaseII, title = "EWMA chart: pistonrings")
```

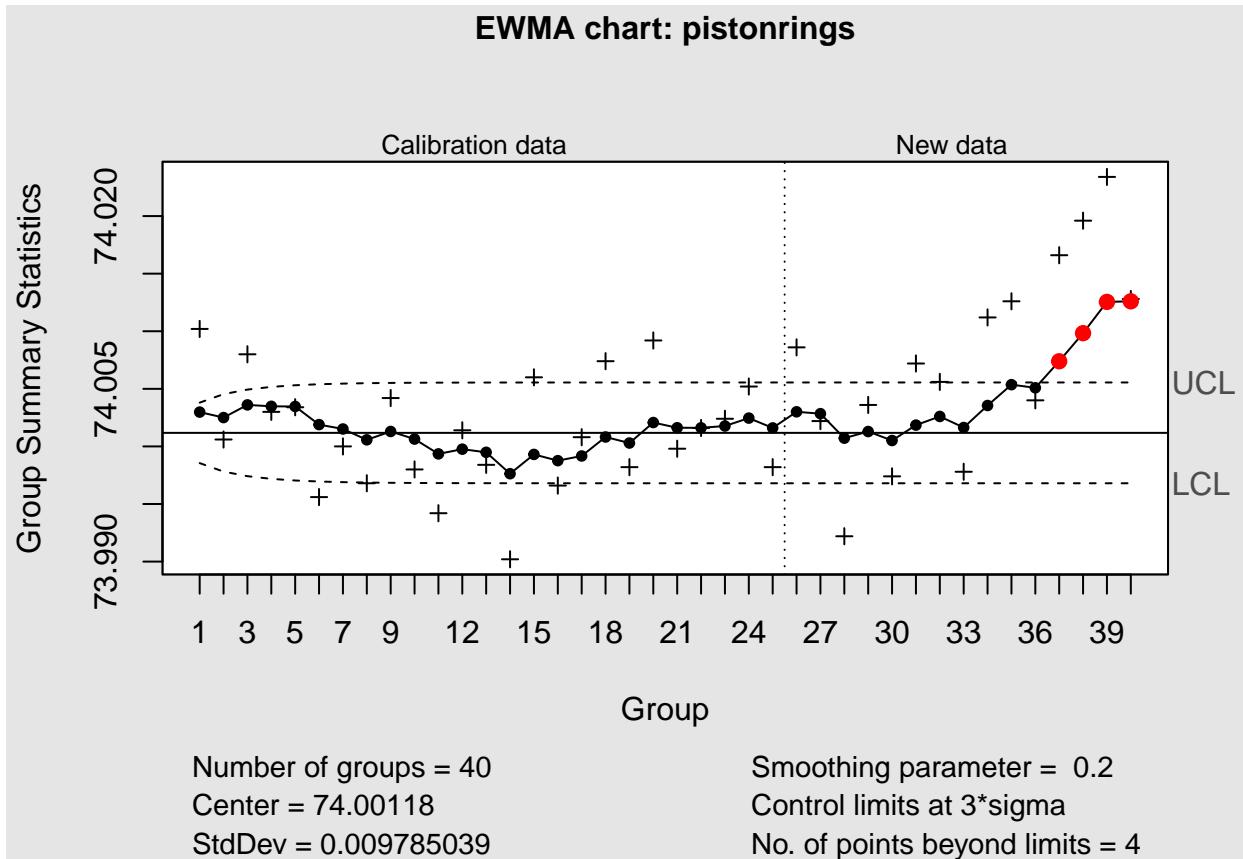

- Observed values are “plus” and predicted values are “dots”.
- Default value of smoothing is 0.2. May be set by the argument `lambda`.
- Default value of  $k$  is 3. May be set by the argument `nsigmas`.

## 0.9 Multivariate charts

- In some situations , it is important to watch the covariation between two or more variables.
- We shall limit our considerations to two variables  $y$  and  $x$ .
- We assume a linear regression equation for  $y$  depending on  $x$ .
- We have data to estimate the line and the expected deviation from the line.
- We have estimates of mean and standard deviation for  $x$ .

An outlier would deviate from the line and/or the x-mean, so we calculate

- $Zy_x$  denoting the standardized residual from the regression line.
- $Zx$  denoting the standardized residual from the expected mean of  $x$ .

We expect that both  $Zy_x$  and  $Zx$  should be within the limits  $\pm 2$ . In order to get an overall teststatistic, we calculate

$$T^2 = \frac{m-1}{m-2} Zy_x^2 + Zx^2$$

where  $m$  is sample size.

## 0.10 Multivariate charts

Alternatively, one might interchange the role of  $x$  and  $y$ . But that does not matter. Actually it holds that

$$T^2 = \frac{m-1}{m-2} Zy_x^2 + Zx^2 = \frac{m-1}{m-2} Zx_y^2 + Zy^2$$

- If the process is in control, then  $T^2$  has a chi-square distribution with 2 degrees of freedom.
- It is critical to the process if  $T^2$  is large, i.e. we only need an upper limit.

```
load(url("https://asta.math.aau.dk/datasets?file=T2Example.RData"))
```

```
head(X$X1, 3)
```

```
##      [,1] [,2] [,3] [,4]
## [1,]    72   84   79   49
## [2,]    56   87   33   42
## [3,]    55   73   22   60
```

## 0.11 Multivariate chart example

```
head(X$X2, 3)
```


```
##      [,1] [,2] [,3] [,4]
## [1,]    23   30   28   10
## [2,]    14   31    8    9
## [3,]    13   22    6   16
```

- $X$  is a list
- $X$X1$  is a matrix, where the rows are samples of variable  $X1$
- Actual sample size is 4 and the number of samples is 20.

Similarly  $X$X2$  has samples for variable  $X2$

## 0.12 Multivariate chart example


```
h <- mqcc(X, type = "T2")
```

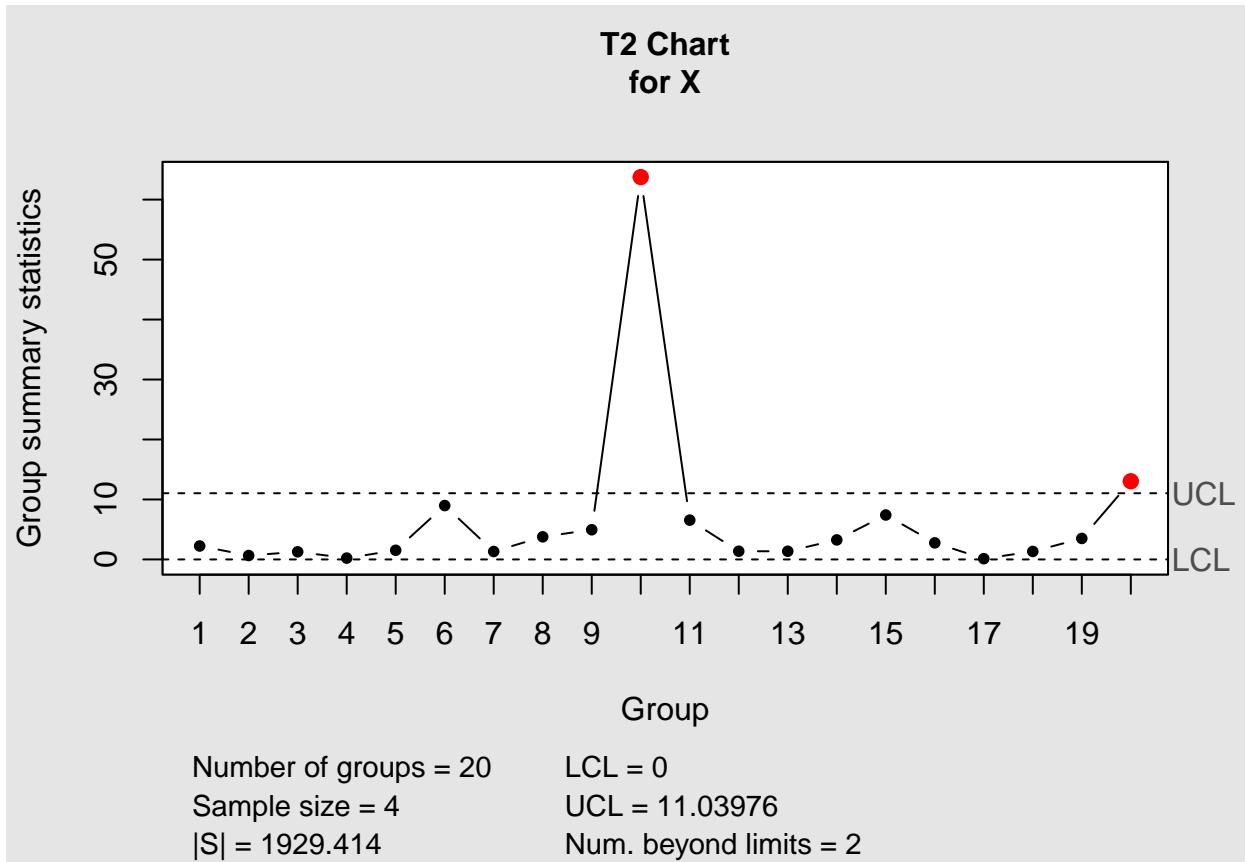

When the parameters are estimated from phase I samples, then the reference distribution is not chi-square, but rather a scaled F-distribution.

### 0.13 Multivariate chart example

```
ellipseChart(h, show.id = TRUE)
```

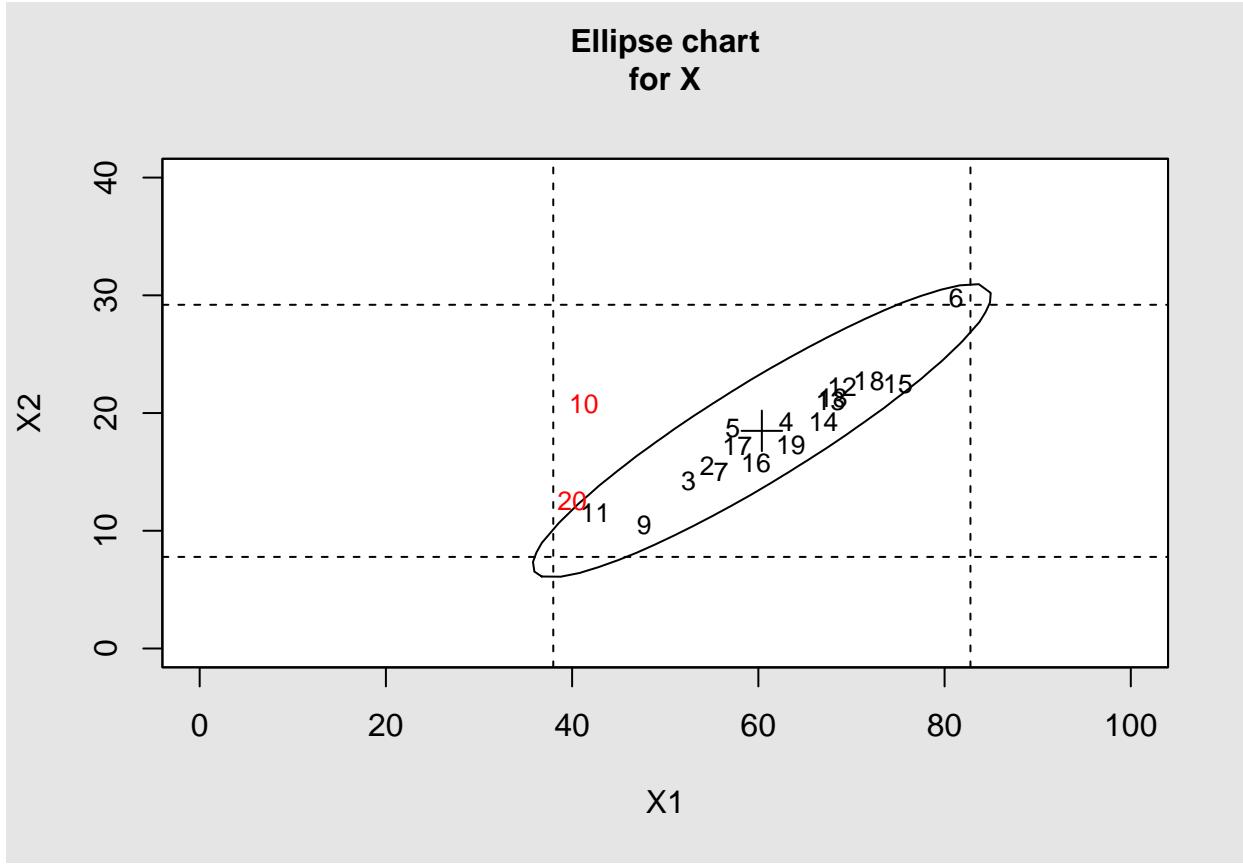

Observation 10 deviates a lot from the regression line.

The acceptance area is an ellipse.

## 0.14 Acceptance sampling

Set-up:

- Production process where we produce lots of size  $N$ .
- From the lot we take a sample of size  $n$ .
- If the number of defective items exceeds the number  $c$ , then the lot is rejected.

We term this a  $(N, n, c)$  sampling plan. Possible reasons for acceptance sampling:

- Testing is destructive
- The cost of 100% inspection is very high
- 100% inspection takes too long

## 0.15 Sampling distributions

- Let  $X$  denote the number of defective items in the sample.
- Let  $p$  denote the fraction of defective items in the lot.
- The correct sampling distribution of  $X$  is the so called **hypergeometric** distribution with parameters  $(N, n, p)$ .

- If  $N \gg n$ , then the sampling distribution of  $X$  is well approximated by the simpler **binomial** distribution with parameters  $(n, p)$ .
- If  $N \gg n$  and  $p$  is small, then the sampling distribution of  $X$  is well approximated by the much simpler **poisson** distribution with parameter  $np$ .

## 0.16 OC curve of a sampling plan

For a given sampling plan  $(N, n, c)$  the probability of accepting the lot depends on

- the fraction  $p$  of defective items in the lot
- the assumed sampling distribution

We can use the function `OC2c` in the package `AcceptanceSampling` to determine these probabilities.


Sampling plan:  $(1000, 100, 2)$

```
library(AcceptanceSampling)
OCbin <- OC2c(100, 2) #default binomial
OCpoi <- OC2c(100, 2, type = "poisson")
OChyp <- OC2c(100, 2, type = "hypergeom", N = 1000)
```


## 0.17 OC curve of a sampling plan

```
par(mfrow=c(2,2)) #division of plot window
plot(1:10, type = "n", axes = FALSE, xlab = "", ylab = "")
text(4, 5, "(N,n,c)\n(1000,100,2)", cex = 2)
x1 <- c(0, 0.1)
plot(OChyp, xlim = x1, main = "hyper")
plot(OCbin, xlim = x1, main = "binom")
plot(OCpoi, xlim = x1, main = "poiss")
```


$(N, n, c)$   
 $(1000, 100, 2)$

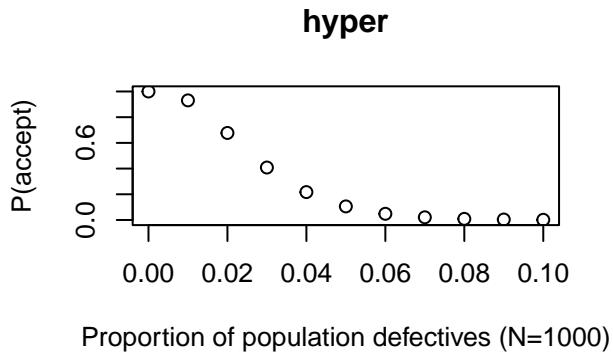

**binom**

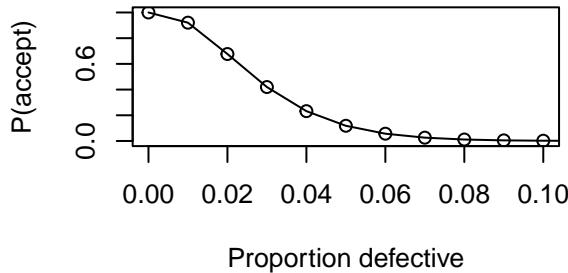

**poiss**

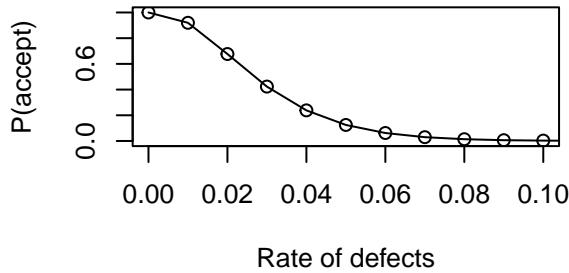

## 0.18 Find sampling plan

Suppose that  $N$  is fixed. If we specify 2 points on the OC curve, then this determines  $(n, c)$ .

- PRP: Producer Risk Point with coordinates  $(p_1, q_1)$ :  $p_1$  is a fraction of defectives, that the producer finds acceptable, e.g.  $p_1=0.01$ . The corresponding probability  $q_1$  of accept should then be high, e.g.  $q_1=0.95$ .
- CRP: Consumer Risk Point with coordinates  $(p_2, q_2)$ :  $p_2 > p_1$  is a fraction of defectives, that the consumer finds unacceptable, e.g.  $p_2=0.05$ . The corresponding probability  $q_2$  of accept should then be low, e.g.  $q_2=0.01$ .

```
find.plan(PRP = c(.01,.95), CRP = c(.05,.01))[1:2]
```

```
## $n
## [1] 259
##
## $c
## [1] 5
```

Default assumption is binomial sampling.

## 0.19 Find sampling plan

```
plan <- find.plan(c(.01,.95), c(.05,.01), type = "hyp", N = 200)[1:2]
plan
```

```
## $n
## [1] 121
##
## $c
## [1] 2
```

```

OChyp <- OC2c(plan$n, plan$c, type = "hyp", N = 200, pd = c(.01,.05))
attr(OChyp, "paccept")
## [1] 1.000000000 0.009609746

```

We cannot have an exact match of the required values (0.95, 0.01) since  $n$  and  $c$  must be integers.

## 0.20 Double sampling

Let  $0 \leq c_1 < r_1$  be integers.

Furthermore,  $c_2$  is an integer such that  $c_1 < c_2$ .

- $x_1$ : number of defectives in an initial sample of size  $n_1$ .
- If  $x_1 \leq c_1$  accept the lot.
- If  $r_1 \leq x_1$  reject the lot.
- If  $c_1 < x_1 < r_1$ : Take a second sample of size  $n_2$  and let  $x_2$  be the number of defectives.
- If  $x_1 + x_2 \leq c_2$  accept the lot. Otherwise reject.

This is known as a **double sampling** plan.

## 0.21 OC curve of a double sampling plan

Determining the OC curve of a double sampling plan requires input of  $n = c(n_1, n_2)$ ,  $c = c(c_1, c_2)$  and  $r = c(r_1, r_2)$ , where  $r_2 = c_2 + 1$ .

```

x <- OC2c(c(125,125), c(1,4), c(4,5), pd = seq(0,0.1,0.001))
x

```

```

## Acceptance Sampling Plan (binomial)
##
##           Sample 1 Sample 2
## Sample size(s)      125      125
## Acc. Number(s)      1         4
## Rej. Number(s)      4         5

```

## 0.22 OC curve of a double sampling plan

```
plot(x)
```

